

ELIMINATOR™ CG

Room Temperature Purifier for Inert Gases

FEATURES



NuPure Eliminator™ Model 600 CG

- ◆ Removal of impurities to <0.5 ppb¹
- ◆ Removes *all* hydrocarbons, including CH₄
- ◆ No heaters or power required
- ◆ Room-temperature operation
- ◆ 316L SS (<10 Ra EP) vessel
- ◆ Factory regenerable for up to 10 year life
- ◆ Field regenerable for up to 10 year life
- ◆ Improved process equipment performance
- ◆ Optional built-in 0.003 µm filter (PF type)
- ◆ High Flow - up to 2500 slpm
- ◆ Low cost (initial and operating)

APPLICATIONS

- ◆ Zero-Hydrocarbon UHP Gas Purge
- ◆ APIMS Zero and Calibration
- ◆ Semiconductor Process Equipment
- ◆ Gas Cylinder Cabinets
- ◆ Gas Analyzer Carts
- ◆ Analytical Industry
- ◆ Research and Development

NuPure's Eliminator™ CG Gas Purifier is designed to purify Inert Gases (Nitrogen or Noble Gases) to state-of-the-art purity, using a **patented** design and process. It removes **all** hydrocarbons (including methane), and all other gaseous impurities found in Inert gases, to PPT levels using *room temperature operation*. The Eliminator™ CG is ideal for **critical process and purging** applications.

The NuPure™ Eliminator™ CG contains a new patented combination of catalyst and metal getter. It contains no hydrocarbon or sulfur compounds. The Eliminator™ CG Purifier incorporates a new unique internal filter design combined with a short purifier geometry, allowing a **very high flow** combined with a **very low pressure drop**.

The Eliminator™ CG gas purifiers come in standard size ranges from 0 to 2500 slpm. The use of optional factory-installed inlet isolation valve (shown in photo) is recommended for elimination of possible operator error during installation. Optional high Cv valves are available to ensure a low system pressure drop.







IMPURITIES REMOVED¹

Gas	Version	H ₂ O	O ₂	CO ₂	CO	H ₂	NMHCs	CH ₄	Particles
N ₂	PF or XL	<0.5 ppb	<0.5 ppb	<0.5 ppb	<0.5 ppb	<0.5 ppb	<0.5 ppb	<1.0 ppb	0.003 µm or 1 µm
Noble	PF or XL	<0.5 ppb	<0.5 ppb	<0.5 ppb	<0.5 ppb	<0.5 ppb	<0.5 ppb	<1.0 ppb	0.003 µm or 1 µm

¹ - Based on a VLSI Grade Liquid Gas source. Nitrogen not removed from noble gases. Removal of nitrogen can be accomplished using **heated getter** purifiers. See brochures for NuPure™ PF Series® and Omni™ Series Gas Purifiers.

ELIMINATOR™ CG

Dimensional and Performance Specifications

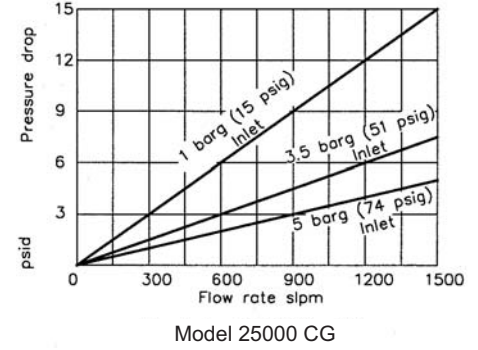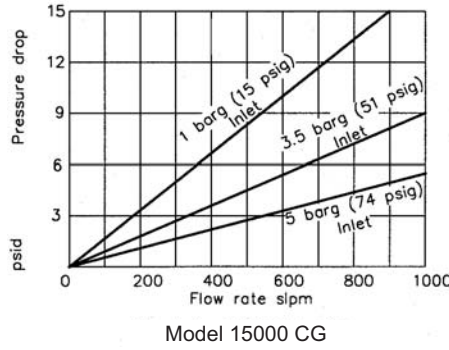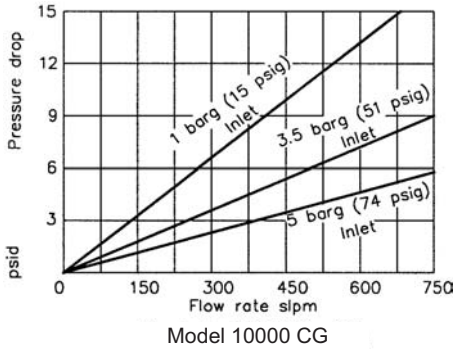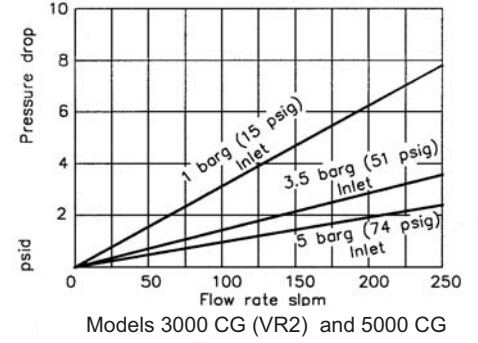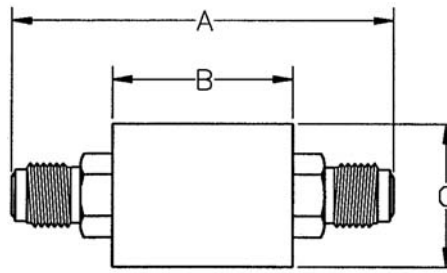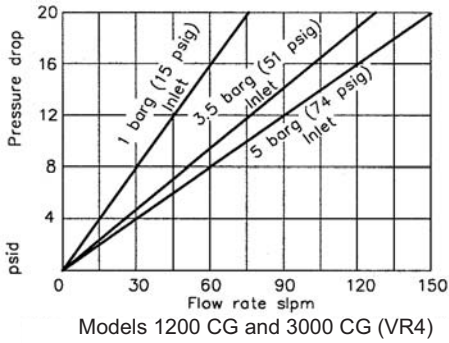

Purifier Model	A in (mm)	B in (mm)	C in (mm)	Particle Filtration Level	Max Flow	Part Number
Mini CG	4.5 (114)	2.7 (69)	1.0 (25)	0.003 μm ¹ or 1 μm	4 slpm	00040-CG-VR4-PF ¹ or XL
100 CG	4.5 (114)	2.7 (69)	1.5 (38)	0.003 μm ¹ or 1 μm	12 slpm	00100-CG-VR4-PF ¹ or XL
200 CG	6.0 (152)	4.2 (107)	1.5 (38)	0.003 μm ¹ or 1 μm	25 slpm	00200-CG-VR4-PF ¹ or XL
500 CG	7.9 (202)	6.1 (156)	2.0 (51)	0.003 μm ¹ or 1 μm	50 slpm	00500-CG-VR4-PF ¹ or XL
600 CG	8.2 (208)	6.5 (167)	2.0 (51)	0.003 μm ¹ or 1 μm	75 slpm	00600-CG-VR4-PF ¹ or XL
1000 CG ²	12.9 (328)	11.1 (282)	2.0 (51)	0.003 μm ¹ or 1 μm	85 slpm	01000-CG-VR4-PF ¹ or XL
1200 CG	7.9 (202)	6.1 (156)	3.0 (76)	0.003 μm ¹ or 1 μm	150 slpm	01200-CG-VR4-PF ¹ or XL
2000 CG	17.7 (449)	15.9 (402)	2.5 (63)	0.003 μm ¹ or 1 μm	250 slpm	02000-CG-VR4-PF ¹ or XL
3000 CG	17.3 (439)	15.5 (394)	3.0 (76)	0.003 μm ¹ or 1 μm	300 slpm	03000-CG-VR4-PF ¹ or XL
3000 CG	17.7 (449)	15.6 (396)	3.0 (76)	0.003 μm ¹ or 1 μm	500 slpm	03000-CG-VR2-PF ¹ or XL
5000 CG ³	25.3 (643)	23.2 (590)	3.0 (76)	0.003 μm ¹ or 1 μm	850 slpm	05000-CG-VR2-PF ¹ or XL
10000 CG ³	35.9 (913)	33.8 (860)	4.0 (101)	0.003 μm ¹ or 1 μm	1200 slpm	10000-CG-VR2-PF ¹ or XL
15000 CG ³	35.9 (913)	33.8 (860)	5.0 (127)	0.003 μm ¹ or 1 μm	1800 slpm	15000-CG-VR2-PF ¹ or XL
25000 CG ³	35.9 (913)	33.8 (860)	6.0 (152)	0.003 μm ¹ or 1 μm	2500 slpm	25000-CG-VR2-PF ¹ or XL
Maximum Pressure	250 psig (USA) / 9.9 kg/cm ² G (Japan)			Materials	316L SS (<10 Ra EP)	
Operating Temperature	Room Temperature			Fittings	1/4" MVCR ⁴ available on sizes Mini-3000	
Leak Rate	<2 x 10 ⁻⁹ atm cc/sec He				1/2" MVCR ⁴ available on sizes 600-25000	

1 - Sub-micron filtration only with PF version.

2 - For model 1000 dimension "A" has changed from 12.1 in to 12.9 in, dimension "B" has changed from 10.3 in to 11.1 in.

3 - For models 5000 and larger - printed dimensions are subject to future change. Please check with factory prior to ordering.

4 - VCR-compatible standard. VCR is Registered Trademark of Cajon Corporation. Special fittings on request.

NuPure III

67 Iber Road, Unit 107,
Ottawa ON K2S 1E7 Canada
Tel: (613) 836-0336 Fax: (613) 836-0297
E-mail: sales@nupure.com Web-site: www.nupure.com

Or Contact:



Teesing B.V. tel: +(31) 70 413 07 00
Verrijn Stuaartlaan 40 fax: +(31) 70 413 07 30
2288 EL Rijswijk mail: info@teesing.com
The Netherlands site: www.teesing.com