


UltraPure® PF Series® Point-of-Use UHP Gas Purifiers

FEATURES

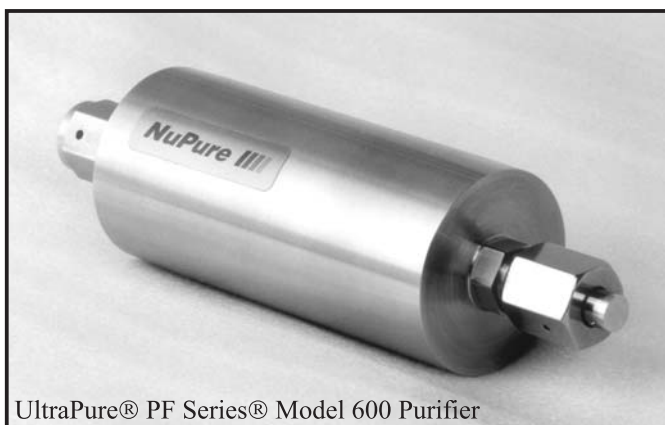

UltraPure® PF Series® Model 600 Purifier

- ◆ Purifier / Particle Filter combination
- ◆ Improves Equipment performance and process economy
- ◆ Sub-ppb removal of impurities from Inert Gases, Nitrogen, Hydrogen, Acid Gases, Oxygen and Hydride Speciality Gases
- ◆ Integral 0.003 µm Sintered Stainless Steel Filter Media (9 log reduction)
- ◆ 316L stainless steel (<10 Ra) or 316L VAR (<5 Ra) electropolished wetted surface finish
- ◆ Optional Hastelloy C-22 filter media / housing or Nickel filter media
- ◆ In-Situ regeneration and bakeable to 450° C

APPLICATIONS

- ◆ Semiconductor Industry
- ◆ High Purity Welding
- ◆ Gas Analyzer Carts
- ◆ Analytical Industry
- ◆ Research and Development
- ◆ Gas Bottle Filling Plants

The PF Series® Purifier-Filter reduces a wide range of gaseous impurities (see chart below) to sub-ppb levels from Inert Gases, Hydrogen and Hydrides, Acid Gases and Oxygen, and includes filtration to 0.003 µm in one single unit.

The PF Series® gas purifiers come in a standard range of 0 - 100 slpm. High flow purifier units (XL-Series) are available for components sets and bulk purifier systems.

High pressure purifiers (max 3000 psig) available upon request, are ideal for gas bottle filling plants and other similar high pressure applications.

LISTING OF GASES PURIFIED / FILTERED


Inert Gases		Hydrogen / Hydrides		Acid Gases	Oxygen
Impurities Removed H ₂ O, O ₂ , CO, CO ₂ , H ₂ ¹ (N ₂ , CH ₄) ²		Impurities Removed H ₂ O, O ₂ , CO ₂ , CO, (N ₂) ³		Impurities Removed H ₂ O	Impurities Removed H ₂ O, CO ₂ , (H ₂ , CO, CH ₄) ⁴
Ar	Ar/CH ₄	H ₂	AsH ₃	HBr	O ₂
He	CH ₄	Ar/H ₂	PH ₃	HCl	Air
Ne	CF ₄	N ₂ /H ₂	NH ₃	BCl ₃	N ₂ O
Kr	CCl ₄	SiH ₄	B ₂ H ₆	BF ₃	
Xe	SF ₆	Si ₂ H ₆	H ₂ Se	Cl ₂	
N ₂	Freons	D.C.S.	GeH ₄	HF	

1 - Only with purchase of -H model. 2 - Additional impurities removed from He, Ne, Ar, Kr, Xe and N₂ only, using heated getter.

3 - Additional impurities removed from Hydrogen only, using heated getter. 4 - Only with purchase of optional heated catalyst.

UltraPure® PF Series®

Dimensional and Performance Specifications

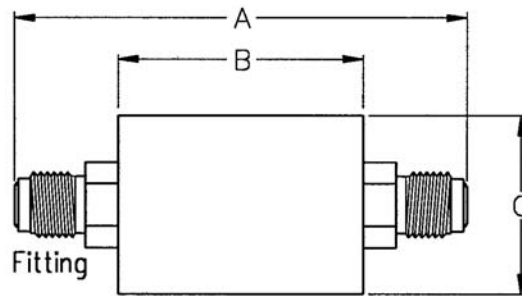

Model	A in (mm)	B in (mm)	C in (mm)	Average Flow (slpm) ¹ for 1 year lifetime (removal of impurities per chart page 1)	Max Flow (slpm) @150 psig PF Series	Max Flow (slpm) @ 150 psig XL Series Room Temp
Mini PF	3.3" (84)	1.5" (38)	1.0" (25)	0.3	1.5	4.5
100 PF	3.3" (84)	1.5" (38)	1.5" (38)	1	5	15
200 PF	4.8" (122)	3.0" (76)	1.5" (38)	2	10	30
600 PF	6.3" (160)	4.5" (114)	2.0" (51)	6	30	90
1000 PF	8.8" (224)	7.0" (178)	2.0" (51)	10	50	150
2000 PF	12.5" (317)	10.7" (272)	2.5" (63)	20	100	300
Maximum Pressure	250 psig (USA) / 9.9 kg/cm ² G (Japan)			Materials	316L SS (<10 Ra) or 316L VAR (< 5 Ra)	
Operating Temperature	Room Temperature or 375-450°C			Fittings	1/4" VCR ² / Compression / Tubing	
Leak Rate	< 2 x 10 ⁻¹⁰ atm cc/sec He			Gas Inlet	VLSI grade (99.9995% minimum) ¹	

1 - Lifetime is inversely proportional to the total inlet impurity level and to average flow. Lifetime for H₂O/O₂ removal only using getter purifiers is approx **4 years** at the stated flows / inlet gas. Room temperature getter purifiers will require periodic regeneration to achieve this total lifetime.

2 - VCR compatible fitting standard. VCR® is a registered trademark of Cajon Corporation.

UltraPure®XL Series

The XL Series of Gas Purifiers are available in the above dimensions for applications requiring < 1 ppb with high flow performance. For Semiconductor Applications, a sub-micron filter should be installed downstream of the purifier. See NuPure Metal and Ceramic Filter data sheet for a full selection of Gas Particle Filters.

UltraPure®Standard Series

The Standard Series of Gas Purifiers are available in the above dimensions. They are recommended for Industrial, Research and Analytical applications requiring <10 ppb with high flow performance.

For regeneration and for applications requiring removal of all impurities, an external band heater, digital temperature controller with solid state relay and thermal insulation blanket is recommended.

NuPure III

67 Iber Road, Unit 107,
Ottawa ON K2S 1E7 Canada
Tel: (613) 836-0336 Fax: (613) 836-0297
E-mail: sales@nupure.com Web-site: www.nupure.com

Or Contact:



Teesing B.V.
Verrijn Stuaartlaan 40
2288 EL Rijswijk
The Netherlands
tel: +(31) 70 413 07 00
fax: +(31) 70 413 07 30
mail: info@teesing.com
site: www.teesing.com