

# SS2 Pressure Transducers

Superior stability and reliability in pressure measurement based on proven sensing technologies

- » Digital architecture with multiple calibration points
- » Ultimate stability and reliability
- » Enhanced thermal compensation over a temperature range of  $-4^{\circ}$  to  $140^{\circ}\text{F}$  ( $-20^{\circ}$  to  $60^{\circ}\text{C}$ ) for gas distribution equipment
- » For Class I, Div. II, Groups A, B, C and D with approved barriers



## Product Description

Celerity's SS2 (formerly SolidSense II) are pressure transducers designed for stable, accurate, and reliable pressure monitoring in ultra-high purity applications.

Celerity's third generation UHP pressure transducer utilizes glass-fused strain gauge technology, developed for the demanding requirements of aerospace and proven in high volume automotive applications, enabling a new level of performance for the micro electronics industry.

The ultra stable, micro machined silicon strain gauges are matched and fused, at high temperature to the metal diaphragm to relieve manufacturing induced stress. The process reduces "drift" (lack of zero stability) commonly associated with competitive products. Consequently, down time for zero adjustment to compensate for "drift" are exponentially reduced. In addition, the unique mechanical design eliminates the torque effects during installation.

SS2 digital architecture enables automated software driven calibration and a wide range of thermal compensation routines, unlike the passive compensation used in competitive devices. This not only enhances (measurement) repeatability regardless of changes to the operational environment, but also drives consistency of performance from one transducer to the next.

For specific pressure ranges, output signal types, and process fittings available, see [www.celerity.net](http://www.celerity.net).

## Features


- Ultra stable glass bonded sensing elements
- Electropolished wetted material for UHP applications
- 4 to 20 mA, 0.05 to 5.05 V, and 0.00 to 10.00V outputs available
- Digital signal processing, high performance digital electronics
- CE compliant
- 2 year warranty

## Applications

Gas delivery systems and tools used for semiconductor processing, including:


- Specialty gas cabinets
- Valve Manifold Boxes (VMBs)
- Gas panels
- Bulk gas distribution systems

## Product Configurations

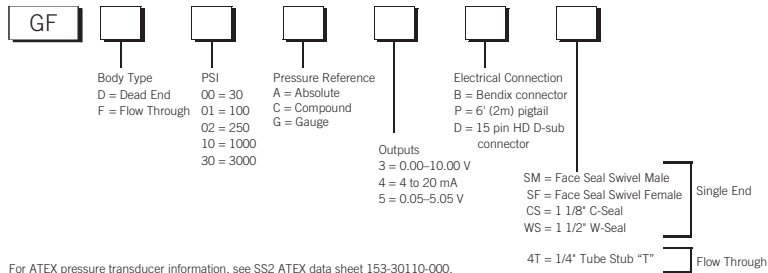

For ATEX pressure transducer information, see SS2 ATEX data sheet 153-30110-000.

## Product Dimensions

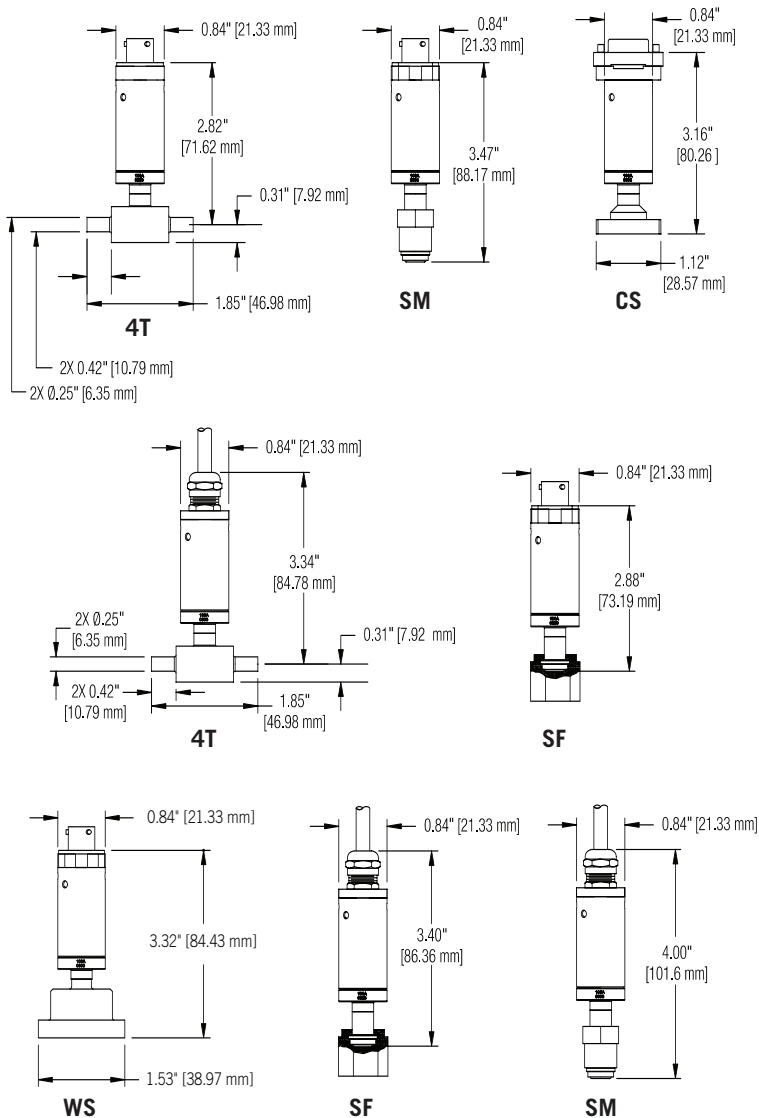

## SS2 Pressure Transducer Specifications

Supply Current	Max. 10 mA for 0.00 to 10.00 VDC output and 0.05 to 5.05 VDC output
Power Requirements	10 to 30 VDC for 4 to 20 mA output 11 to 30 VDC for 0.05 to 5.05 VDC output 13 to 32 VDC for 0.00 to 10.00 VDC output
Electrical Connections	4-pin male Bendix® connector, 6 ft. (2 m) Pigtail (24 AWG shielded) or 15-pin D-Sub HD male connection
Electrical Protection	Reverse polarity for power connections
Operating Temp.	-20 to 180°F (-29° to 82°C)
Storage:	-4° to 140°F (-20° to 60°C)
Compensated:	68° to 140°F (20° to 60°C) 0–10 VDC version
Housing	Stainless steel, polymer plastics
Burst Pressure	400% full scale
Proof Pressure	200% full scale up to 1000 psi, 150% full scale for higher ranges
Wetted Parts	316L stainless steel, SEMI F20
Surface Finish	Compliant with SEMI F19
Cleanliness	Compliant to ASTM F1374-92 (2005)
Internal Volume	1.79cc
Process Connections	See ordering guide for options.
<b>Accuracy</b>	
Linearity (BFSL) Hysteresis	
Repeatability	±0.25% full scale (RSS)
Response Time	<5 msec
Zero and Span Temp. Coefficient (each)	
≥100 PSI Range F.S.	±0.02% F.S./°F (-4° to 140°F, -20° to 60°C) ±0.50% F.S. (20° to 60°C) 0–10 VDC version
<100 PSI Range F.S.	±0.04% F.S./°F (-4° to 140°F, -20° to 60°C) ±1.00% F.S. (20° to 60°C) 0–10 VDC version
Approximate Shipping Weight	0.70 lb. (0.32 kg)
FM Approved	Nonincendive for use in Class I, Div. II Groups A, B, C, and D Hazardous Applications Excludes 0–10V and 15 pin HD D-sub connector configurations
CE	Compliant to EMC directive EN61326



CELERITY, INC.  
915 Enterprise Boulevard  
Allen, TX 75013 USA  
Telephone 972.359.4000  
Facsimile 972.359.4100  
www.celerity.net

For technical assistance, contact Celerity Technical Support at 972.359.4000.



Celerity and SolidSense are trademarks of Celerity, Inc. All other product or service names mentioned in this document may be trademarks of the companies with which they are associated. System descriptions are typical and subject to change without notice.