


**Gerade Aufschraubverschraubung**  
**Union femelle**  
**Female adaptor union**

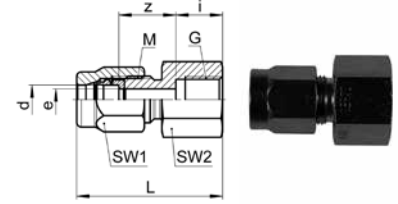

**SO 81221**

Type -d -G	Mat.-Nr.	bar	M	SW1	SW2	L	i	z	e	kg/100
G=Rohrgewinde (zylindrisch)										
			G=Filetage-gaz BSP (cylindrique)							
								G=BSP thread (straight)		
* SO 81221-4-1/4	038.1201.065	100	10x1	12	17	31.5	11.0	13.0	3.4	3.110
SO 81221-6-1/8	038.1201.100	200	10x1	12	14	29.5	10.0	12.0	4.5	2.360
SO 81221-6-1/4	038.1201.110	200	10x1	12	17	31.5	11.0	13.0	4.5	3.000
SO 81221-8-1/4	038.1201.170	125	12x1	14	17	32.5	11.0	13.5	6.5	2.430
SO 81221-10-1/4	038.1201.270	80	14x1	17	17	34.5	11.0	13.5	8.5	4.180
SO 81221-10-3/8	038.1201.280	80	14x1	17	22	35.5	12.0	13.5	8.5	5.900
* SO 81221-10-1/2	038.1201.285	80	16x1	19	27	38.0	14.0	14.0	8.5	9.060
SO 81221-12-1/4	038.1201.380	80	16x1	19	17	35.5	11.0	13.5	8.5	4.790
SO 81221-12-1/2	038.1201.400	80	16x1	19	27	39.0	14.0	14.0	10.0	8.780
SO 81221-15-1/2	038.1201.534	25	20x1.5	24	27	42.5	14.0	16.0	12.5	11.520
SO 81221-15-3/4	038.1201.536	25	20x1.5	24	32	45.5	17.0	16.0	13.0	13.640
SO 81221-18-1/2	038.1201.646	25	24x1.5	27	27	44.0	14.0	16.0	14.5	12.750

d=Rohraussen-ø  
 e=kleinste Bohrung  
 L=Mass in montiertem Zustand  
 \*=mit reduziertem Klemmring

d=ø extérieur du tube  
 e=ø-min. de passage  
 L=après montage  
 \*=avec bague de serrage de reduction

d=tube outside diameter  
 e=minimum bore  
 L=installed length  
 \*=with reduction compression ferrule