

## ➤ Mott Static Flow Controller



### Description

The Static Flow Controller (SFC) is a high accuracy flow setting device for gas applications. Completely customized to your conditions, the SFC sets a repeatable flow rate from 1 sccm to 40 slpm\* based upon your gas type and pressure. Flow rate accuracy within 1% is achieved through proprietary porous metal technology and NIST traceable primary standard equipment.

### Features

- High accuracy, low cost
- +/- 1% Flow accuracy at the set point flow conditions
- Each SFC individually calibrated to your conditions
- +/- 0.1% repeatability
- Significant cost advantage over standard flow controller technology
- No need for expensive re-calibrations

### Benefits

- Reliable and robust design
- Tamper-proof flow rate set to your conditions
- Long-life, anti-clog technology
- Compact design saves critical space
- Flow correction factors provided for varying temperatures and pressures conditions
- Manufactured in ISO class 5 cleanroom

### Ordering Information

1. Desired flow rate (in sccm or slpm)
2. Specify gas (ex. Nitrogen)
3. Upstream pressure (in psi)
4. Downstream pressure (in psi)
5. Specify hardware configuration (custom optional)
6. Specify operating gas temperature (°C or °F)

### Need Point-of-use Filtration?



See our High Purity filter options available at <http://www.mottcorp.com>

*\*Ultra low flow and high flow rates available, contact a Mott sales representative for more information.*

➤ high purity products

➤ [mottcorp.com](http://mottcorp.com)

## Specifications

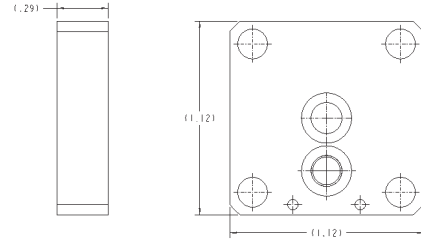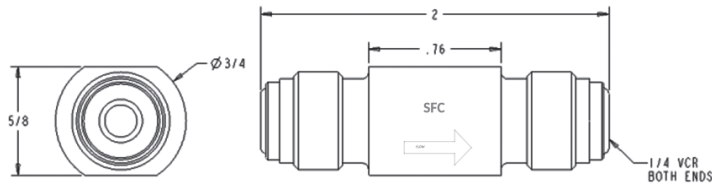

Flow Ranges Available

1 sccm to 40 slpm

Operating Conditions Available

Upstream

Positive pressure  
Positive high pressure  
Positive pressure  
ATM  
Vacuum



Downstream

ATM  
Positive low pressure  
Vacuum  
Vacuum  
Vacuum

Contact a Mott sales representative with desired conditions

Max Inlet Pressure / Max Differential Pressure

1500 psig

Accuracy

+/- 1% of reading (> 10 sccm)  
+/- 0.2 sccm of reading (< 10 sccm)

Repeatability

+/- 0.1% of reading

Operating Temperature

Up to 450°C

Warm-up Time

N/A

Wetted Materials

316L Stainless Steel

Surface Finish

10 Ra (average)

Leak Integrity (External)



$1 \times 10^{-9}$  atm cc/sec Helium Leak Rating

Fittings (compatible with)\*

1/4" Face Seal / IGS 1.125" C-Seal

\*other fittings available on request

## Effect on Flow Rate Variation

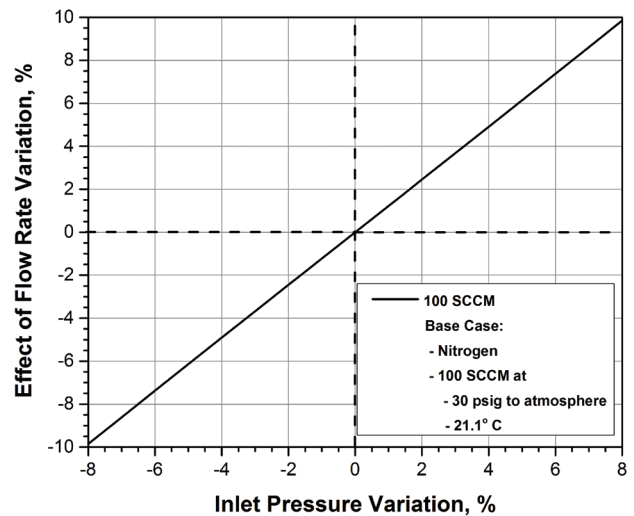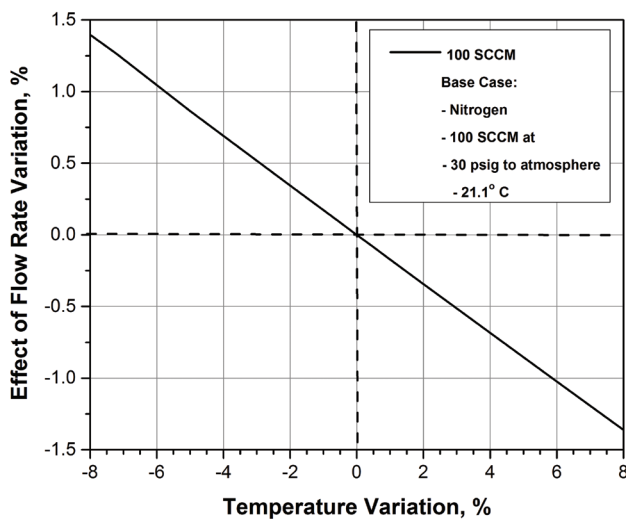

**mott corporation**



ISO 9001 CERTIFIED  
HPSFC 0815

**TEESING**

WE MAKE YOUR TECHNOLOGY WORK

84 Spring

Farmington, CT 06032-3159 | 860-747-6333 Fax 860-747-6739  
www.mottcorp.com | email flow@mottcorp.com